

# TRANSMITTER LP3 Series

The LP3 series is used to measure positive, negative or differential pressure. The piezoresistive sensor is ideal for monitoring the pressure of air or other clean inert gas. Typical HVAC applications include monitoring of filter differential pressure or VAV applications. An integrated static pressure probe provides ease of installation for duct mounting. Several accessories are available.

# **SPECIFICATION:**

Accuracy	.±1% F.S.O.
	.Differential (two port), Static,
	Velocity, & Total Pressure
Response Time	
Stability	.< ±1% F.S.O. per year
Thermal Effects	.< ±3% over compensated range
Compensated Range	
	.40" W.C. (100" for 10" & 20" Models)
Burst Pressure	.60" W.C. (200" for 10" & 20" Models)
Operating Conditions	.0 - 70°C (32 - 158°F),
	10 - 90 %RH, non-condensing
Power Supply	.20 - 28 Vac/dc
	(non-isolated half-wave rectified)
Supply Current	.< 4 mA
	.Negligible over operating range
Protection Circuitry	.Reverse voltage protected and
	output limited
Output Signal	
	0-10 Vdc (3-wire), switch selectable
	.Current: 400 ohms max @ 24 vdc
	Voltage: 10K ohms min
Zero Adjustments	
	.Screw terminal block (14 to 22 AWG)
Pressure Connection	.Barbed ports for 5 mm (0.170" ID)
	flexible tubing
	.½" NPT conduit or cable gland
	.3½ digit LCD, 0.4" digit height
Enclosures	
Weight	.159 grams (5.6 oz)

# **TYPICAL INSTALLATION:**

For complete installation and wiring details, please refer to the product installation instructions.

The LP3 mounts on any surface using the two holes provided on the base of the unit. Make sure there is enough space around the unit to connect the pressure tubing without kinking and avoid locations where severe vibrations or excessive moisture are present.

The unit may be mounted in any position but typically is installed on a vertical surface with pressure ports on the right and the cable entrance on the left. If the unit has the integrated static pressure probe, drill a hole in the duct and insert so the probe point is facing into the airflow. The enclosure has a standard opening for a 1/2" conduit and may be installed with either conduit and a conduit coupler or a cable gland type fitting.




#### **PART NUMBER SELECTED**

# PRODUCT SELECTION INFORMATION:

PRODUCT SELECTION INFORMATION:							
МО	DEL	Product Description					
LF	93	Low Pressure Transmitter					
		CODE Options					
		A B	Standard LCD Displ				
			CODE	Range			
			00 01	±1", ±2", ±4", 0-1", 0-2", 0-4" W.C. ±3", ±5", ±8", 0-3", 0-5", 0-8" W.C.			
			02 03	±6", ±10", ±12", 0-6", 0-10", 0-12"W.C. ±10", ±15", ±20", 0-10", 0-15", 0-20"W.C.			
			04 05	±250, ±500, ±1000, 0-250, 0-500, 0-1000 Pa ±500, ±1000, ±2000, 0-500, 0-1000, 0-2000 Pa			
			03				
				S	Options Integrated Static Pressure Probe		
1	7	▼	▼	▼			

 $Greystone\ Energy\ Systems, Inc.\ reserves\ the\ right\ to\ make\ design\ modifications\ without\ prior\ notice.$ 
















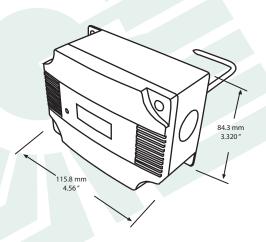




### **TYPICAL INSTALLATION:**

#### **Duct Static Pressure**

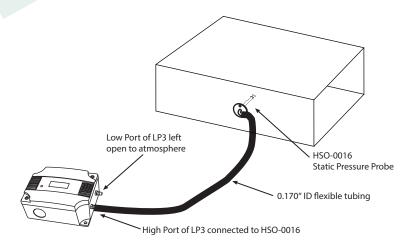


# **Duct Airflow Velocity**



# **ACCESSORIES:**

# **FPP & SPP - Pitot Tubes**



# SSS - Differential Pressure Probe



Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



Greystone Energy Systems, Inc. 150 English Drive, Moncton, New Brunswick, Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014 North America: 1-800-561-5611 e-mail: mail@greystoneenergy.com www.greystoneenergy.com









Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leadingedge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.