



# GREYSTONE

ENERGY SYSTEMS INC

## OUTSIDE HUMIDITY /TEMPERATURE TRANSMITTER RH310 Series

The RH310 series uses a highly accurate and reliable Thermoset Polymer based capacitance humidity sensor and Platinum RTD temperature sensor together with state-of-the-art digital linearization and temperature compensated circuitry to monitor humidity levels. A hinged, gasketed weatherproof ABS enclosure provides easy of installation and protection from the elements.



### SPECIFICATION:

Humidity Sensor Type..... Thermoset polymer based capacitive  
Accuracy .....  $\pm 2, 3$ , or 5% RH, (5% to 95% RH)  
Measurement Range..... 0 to 100% RH  
Hysteresis .....  $\pm 1.5\%$  RH maximum  
Stability .....  $\pm 1\%$  RH typical at 50% RH in 5 yrs.  
Sensor Response Time..... 15 seconds typical  
Temperature Sensor Type..... 1000  $\Omega$  Platinum. IEC751, 385 Alpha, thin film, Class B  $\pm 0.3^\circ\text{C}$  @  $0^\circ\text{C}$   
Operating Temperature .....  $-40^\circ$  to  $70^\circ\text{C}$  ( $-40^\circ$  to  $158^\circ\text{F}$ )  
Operating Humidity ..... 0 to 95% RH non-condensing  
Power Supply..... 18 to 30 Vdc, 15 to 26 Vac  
Consumption..... 40 mA maximum  
Input Voltage Effect..... Negligible over specified operating range  
Protection Circuitry..... Reverse voltage protected and output limited  
Output Signal..... 4-20 mA current loop, 0-1, 0-5 or 0-10 Vdc  
Output Drive at 24 Vdc..... 550 ohms max for current output 10K ohms min for voltage output  
Wiring Connections..... Screw terminal block (14 to 22 AWG)  
Enclosures ..... ABS, UL94-5VB, IP65 (NEMA 4X)

### PART NUMBER SELECTED

### PRODUCT SELECTION INFORMATION:

MODEL	Product Description
RH310A	Outside Humidity/Temperature Transmitter

CODE	RH Accuracy
02C	2%
03C	3%
05C	5%

CODE	Output Signals (RH and Temperature)
2A	4-20 mA
2D	0-5 Vdc
2E	0-10 Vdc

CODE	Scaled Temperature Span
1	$0^\circ - 35^\circ\text{C}$ ( $32^\circ - 95^\circ\text{F}$ )
2	$0^\circ - 50^\circ\text{C}$ ( $32^\circ - 122^\circ\text{F}$ )
3	$0^\circ - 100^\circ\text{C}$ ( $32^\circ - 212^\circ\text{F}$ )
6	$-50^\circ - 50^\circ\text{C}$ ( $-58^\circ - 122^\circ\text{F}$ )

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

### Custom Temperature Range:


### TYPICAL INSTALLATION:

**For complete installation and wiring details, please refer to the product installation instructions.**

The RH310 should be mounted on an outside North facing wall, under the eaves which will provide protection from direct sunlight and wind.

The RH310 can be mounted directly to buildings wall face using the four provided mounting holes. There are 0.85" holes for conduit connection.

### DIMENSIONS:

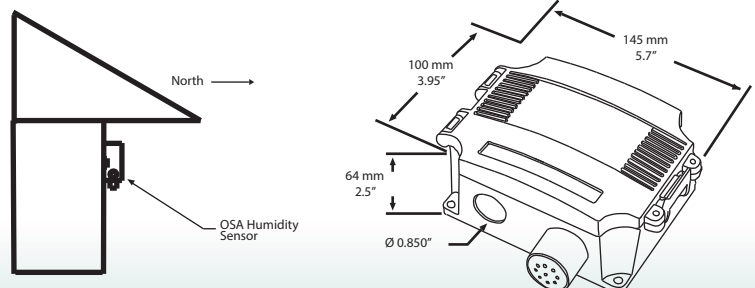

Greystone Energy Systems, Inc. (506) 853-3057 Fax: (506) 853-6014  
150 English Drive, Moncton, North America: 1-800-561-5611  
New Brunswick, Canada E1E 4G7 e-mail: mail@greystoneenergy.com  
www.greystoneenergy.com

**RoHS**  
COMPLIANT

