


NAMUR MOUNT SOLENOID VALVE

Manual Override, 100% Duty Rating

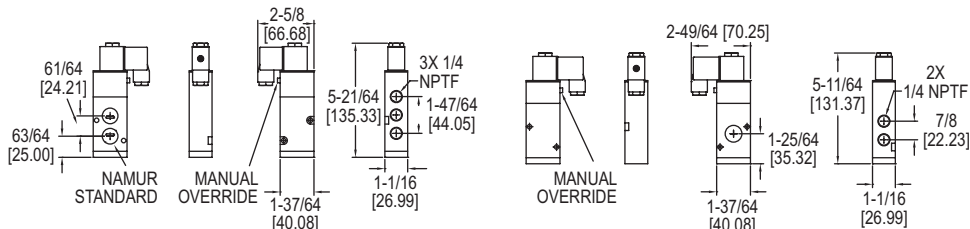

SN-5X models

SN-3X models

The **Series SN Namur Mount Solenoid Valve** is designed to easily mount directly to pneumatic valve actuators reducing the need for tubing, fittings or brackets, thereby reducing assembly cost. The SN solenoid comes with nitrile o-rings and offers a manual override as a standard feature. The 3/2 solenoids are designed for spring return actuators and 5/2 solenoids are designed to be used with double acting actuators. The SN series is available in a variety of voltages for any application.

FEATURES/BENEFITS

- NAMUR mount means the solenoid can be mounted directly to valve actuators
- Designed for double acting or spring return actuators
- 100% continuous duty rating
- Manual override

APPLICATIONS

- Direct mount to pneumatic actuators

MODEL CHART							
Model	Power	Action	Actuator Type	Model	Power	Action	Actuator Type
SN-5A	110 VAC	5/2	Double acting	SN-3A	110 VAC	3/2	Spring return
SN-5B	220 VAC	5/2	Double acting	SN-3B	220 VAC	3/2	Spring return
SN-5C	24 VAC	5/2	Double acting	SN-3C	24 VAC	3/2	Spring return
SN-5E	24 VDC	5/2	Double acting	SN-3E	24 VDC	3/2	Spring return
SN-5D	12 VDC	5/2	Double acting	SN-3D	12 VDC	3/2	Spring return

SPECIFICATIONS

Service: Air only.

Power Requirements: 24 VAC, 110 VAC, 220 VAC, 12 VDC, or 24 VDC.

Supply Pressure: 22 to 116 psi (1.5 to 7.9 bar).

Air Connections: 1/4" female NPT.

Temperature Limits: 23 to 140°F (-5 to 60°C).

Electrical Connection: DIN 43650 form A.


Enclosure Rating: IP65.

Mounting: NAMUR.

Standard Features: Manual override.

Weight: 1.0 lb (.45 kg).

Agency Approvals: CE.



Model SN mounted
to an actuator