


Series MHS

Miniature High Sensitivity Pressure Switch SPDT N/O or N/C Switch, Adjustable Set Points from 3 in H₂0 to 60 PSI



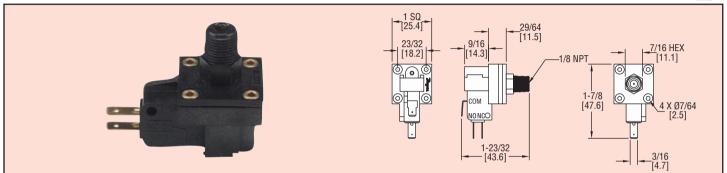

The Series MHS Miniature High Sensitivity Pressure Switch offers a wide range of field adjustable pressure set point options. The compact switch can be used with air or other compatible fluids. Ideal application is for turning pumps and compressors on and off when levels change. The Series MHS models offer a variety of electrical ratings to suit application needs. The switch is easy to install and easy to adjust, with a long mechanical life of over 10 million cycles.

	Set Point in H ₂ O (mbar)	
Model	Minimum	Maximum
MHS-1	3 (7.5)	10 (25)
MHS-2	10 (25)	28 (69)
MHS-3	28 (69)	111 (276)

SPECIFICATIONS

Service: Air or compatible fluids.

Wetted Materials:

Enclosure: polycarbonate; Diaphragm: polyurethane.

Temperature Limits: 40 to 150°F (4 to 66°C).

Pressure Limits: Up to maximum

Repeatability: ±20%.

Switch Type: SPDT normally open or

normally closed.

Electrical Rating: MHS-1: 3A; MHS-2: 10A; MHS-3, -4, -5: 15A, 125/250 VAC. Contacts: Silver with brass terminals

Electrical Connections: Terminals 0.187" x 0.20" spade for use with quick

disconnects.

Process Connections: All models

1/8" NPT port.

Mounting: Use #2 screws through

eyelets.

Weight: 0.71 oz (20 g).
Agency Approval: cUL. UL.