

### Overlapping Two-Door Wall-Mount Enclosures

**Application -**  
Designed to house electrical and electronic controls, instruments and components. Provides protection from dust, oil and water. For outdoor application a drip shield and drain holes are required. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

**Construction -**

- 0.075" carbon steel.
- Seams continuously welded and ground smooth, no holes or knockouts.
- Flange trough collar around all sides of door opening.
- Gasketed overlapping doors eliminate need for center post.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Latch rods have ramp shoes for easier door closing.
- Concealed hinges.
- Removable and interchangeable doors.
- Removable print pocket provided on door with 3-point latch.
- Oil resistant door gasket.
- Collar studs for mounting optional sub-panel.
- Ground stud on door and body.
- Mounting hardware, sealing washers and hole plugs included.

**Options -**

Optional mounting foot kit available (SCE-ELMFK6).

**Finish -**

ANSI-61 gray powder coated inside and out. Optional sub-panels powder coated white.

**IS3 - Industry Standards -**

- NEMA Type 3R, 12 & Type 13
- UL Listed Type 3R & 12
- CSA Type 3R & 12
- IEC 60529 IP66

\*\*\*Special instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

### OVERLAPPING TWO-DOOR WALL-MOUNT ENCLOSURES

Catalog No.	ENCLOSURE PRODUCT CODE #4			List Price	SUB-PANEL (PS)			
	Height (A)	Width (B)	Depth (C)		Panel Height (D)	Panel Width (E)	Panel Price	
SCE-244208WFLP	24.00	42.00	8.00	IS3 531.50	SCE-42P24	39.00	21.00	91.14
SCE-244898WFLP	24.00	48.00	8.00	IS3 576.22	SCE-48P24	45.00	21.00	98.74
SCE-244812WFLP	24.00	48.00	12.00	IS3 615.84	SCE-48P24	45.00	21.00	98.74
SCE-304210WFLP	30.00	42.00	10.00	IS3 655.82	SCE-42P30	39.00	27.00	116.47
SCE-304810WFLP	30.00	48.00	10.00	IS3 690.46	SCE-48P30	45.00	27.00	129.13
SCE-306010WFLP	30.00	60.00	10.00	IS3 799.74	SCE-60P30	57.00	27.00	159.52
SCE-306012WFLP	30.00	60.00	12.00	IS3 861.12	SCE-60P30	57.00	27.00	159.52
SCE-364212WFLP	36.00	42.00	12.00	IS3 740.14	SCE-42P36	39.00	33.00	136.72
SCE-364816WFLP	36.00	42.00	16.00	IS3 805.15	SCE-42P36	39.00	33.00	136.72
SCE-364810WFLP	36.00	48.00	10.00	IS3 794.78	SCE-48P36	45.00	33.00	154.46
SCE-364812WFLP	36.00	48.00	12.00	IS3 807.20	SCE-48P36	45.00	33.00	154.46
SCE-364816WFLP	36.00	48.00	16.00	IS3 881.94	SCE-48P36	45.00	33.00	154.46
SCE-366012WFLP	36.00	60.00	12.00	IS3 941.31	SCE-60P36	57.00	33.00	189.89
SCE-366016WFLP	36.00	60.00	16.00	IS3 1,048.69	SCE-60P36	57.00	33.00	189.89
SCE-424212WFLP	42.00	42.00	12.00	IS3 871.12	SCE-42P42	39.00	39.00	156.97
SCE-424216WFLP	42.00	42.00	16.00	IS3 928.01	SCE-42P42	39.00	39.00	156.97
SCE-424812WFLP	42.00	48.00	12.00	IS3 891.63	SCE-48P42	45.00	39.00	177.24
SCE-424816WFLP	42.00	48.00	16.00	IS3 1,000.42	SCE-48P42	45.00	39.00	177.24
SCE-426012WFLP	42.00	60.00	12.00	IS3 1,040.65	SCE-60P42	56.00	39.00	230.41
SCE-426016WFLP	42.00	60.00	16.00	IS3 1,193.49	SCE-60P42	56.00	39.00	230.41
SCE-484812WFLP	48.00	48.00	12.00	IS3 973.60	SCE-48P48	44.00	44.00	212.67
SCE-484816WFLP	48.00	48.00	16.00	IS3 1,138.64	SCE-48P48	44.00	44.00	212.67





ENQUIRY TO  
Wall-Mount  
Enclosures

Phone (989) 799-6871  
Fax (989) 799-4524



### OVERLAPPING TWO-DOOR WALL-MOUNT ENCLOSURES TECHNICAL DATA

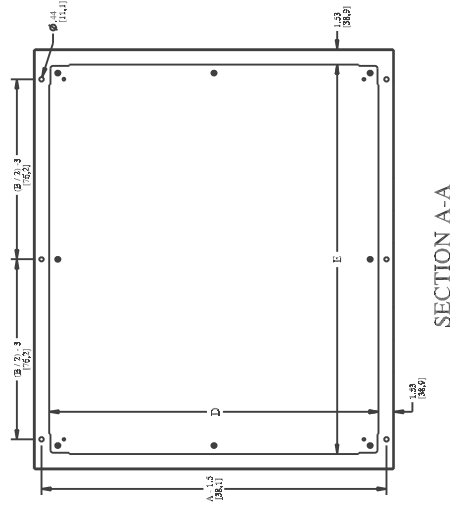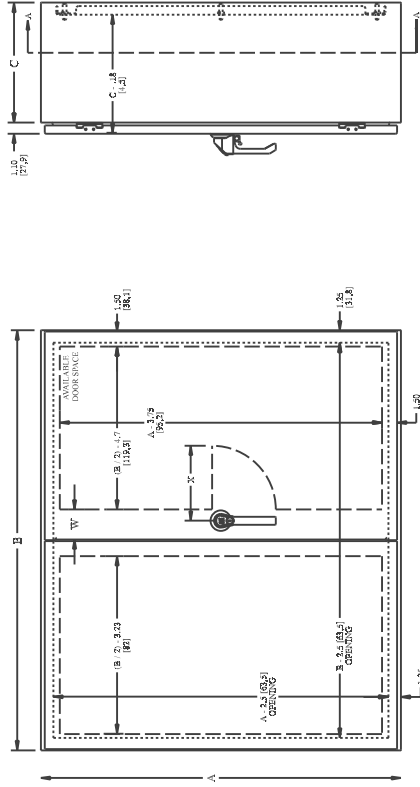

**HANDLE NOTES:**

Enclosures <= 42.00 [1067] in height  
X = 5.50 [140] and uses 5.00 [127]  
key-locking/padlocking handle.

Enclosures >42.00 [1067] in height  
X = 6.75 [171] and uses 7.00 [178]  
key-locking/padlocking handle.

W = 3.63 [92.2] with 7.00 [177.8] handle  
W = 3.00 [76.2] with 5.00 [127] handle

Phone (989) 799-6871  
Fax (989) 799-4524

